

IP Library: Very Low Power, Adjustable Output Voltage², 25mA Low Dropout Voltage Regulator

PRODUCT PREVIEW

- ANALOG BASEBAND REGULATOR
- VERY LOW DROPOUT VOLTAGE : 60mV
- HIGH PSRR : 60dB
- LOW QUIESCENT CURRENT
- 20 μ A STD-BY MODE CURRENT
- NO CURRENT IN POWER DOWN MODE
- SHORT CIRCUIT PROTECTION
- SMALL DECOUPLING CERAMIC CAPACITOR

TYPICAL APPLICATIONS

- Cellular and Cordless phones supplied by 1 cell Lithium-ion battery / 3 cells Ni-MH or Ni-Cd battery.
- PDA (Personal Digital Assistant), Smart phone.
- Portable equipment.
- Supply for Digital (DSP/Microcontroller) devices.

APPLICATION NOTE

An external capacitor ($C_{OUT} = 1\mu F$ typical) with an equivalent serial resistance (ESR) in the range 0.02 to 0.6 Ω is used to ensure stability.

Figure 1 : Block Diagram


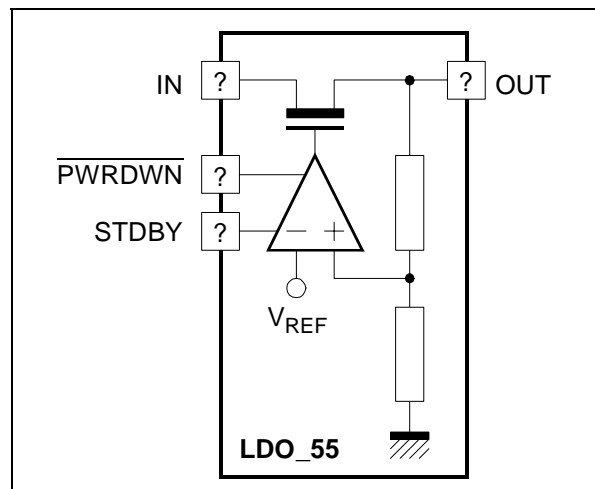


Figure 2 : Typical Application Circuit

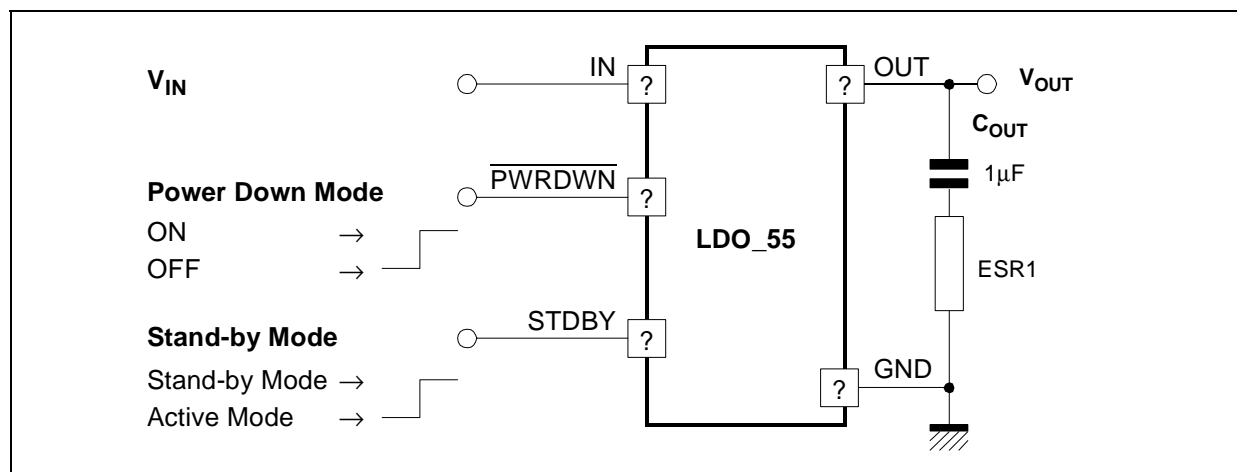

ELECTRICAL CHARACTERISTICS

$3V < V_{IN} < 5.5V$, $-30^{\circ}C < T < +125^{\circ}C$, $0.8\mu F < C_{OUT} < 1.2\mu F$, $20m\Omega < ESR < 0.6\Omega$, $100\mu A < I_{LOAD} < 25mA$.

Typical case : $V_{IN} = 4V$, $T = 25^{\circ}C$, $I_{OUT} = 12.5mA$.

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Input Voltage Range (Note 1)	V_{IN}		3		5,5	V
Output Voltage	V_{OUT}	Adj = 0		1,8		V
		Adj = 1		3		
Output Voltage Accuracy				3		%
Output current	I_{OUT}	Active mode	0,1		25	mA
		Sleep mode	5		500	μA
P_{MOS} Output Resistance	R_{ON}				0,6	Ω
Dropout Voltage	ΔV_{DO}	$\Delta V_{OUT} = 50mV$, $I_{LOAD} = 25mA$			60	mV
		(Note 2)	170			
Quiescent current	I_Q	$I_{LOAD} = 100\mu A$,		30	40	μA
		$I_{LOAD} = 25mA$		60	80	μA
Stand-by mode current	I_{QSTDBY}	$I_{LOAD} = 500\mu A$ $V_{OUT} = 3V$		20	30	μA
Power down mode quiescent current	$I_{QPRWDWN}$	Power down active		100	1 000	nA
Power Supply Rejection Ratio	PSRR	$f < 10KHz$	40	50		dB
Load Regulation	Ldr			15	25	mV
Line Regulation	Lir	$I_{LOAD} = 25mA$		5	10	mV
Line Transient	Lirt	$\Delta V_{IN} = 300mV$ $t_{RISE} = t_{FALL} = 10\mu s$			1	mV
Load Transient	Ldtr	10% to 90% and 90% to 10% of 25mA in 10 μs			1	mV
Output decoupling capacitor	C_{OUT}			1		μF
Settling time (from power down to active mode)	t_{RISE}	From power down to active mode		30	70	μs
	t_{FALL}	From active mode to power down		60	200	μs
Short Circuit Current Limit	I_{SHORT}		100	200	250	mA

Notes: 1. Above characteristics are given for 3V minimum input operating range voltage, but regulator is operational with 2.7V minimum input voltage.

2. All parameters are guaranteed with 170mV Dropout voltage.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

<http://www.st.com>