



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

LOW CAPACITANCE 500W TRANSIENT VOLTAGE SUPPRESSORS


SAC5.0 THRU SA50

FEATURES

- UL 94V0 FLAME RETARDANT EPOXY MOLDING COMPOUND
- DIFFUSED JUNCTION
- LOW COST
- LOW JUNCTION CAPACITANCE

MECHANICAL DATA

- CASE: MOLDED PLASTIC, CASE: DO15, DIMENSIONS IN INCHES AND (MILLIMETERS)
- TERMINALS: AXIAL LEADS SOLDERABLE PER MIL-STD-202, METHOD 208
- POLARITY: COLOR BAND DENOTES CATHODE END
- MOUNTING POSITION: ANY
- WEIGHT: 0.4 GRAMS

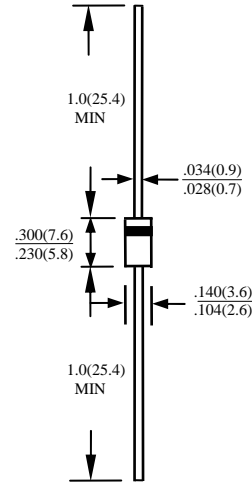

ABSOLUTE MAXIMUM RATING

CHARACTERISTICS	SYMBOL	CONDITIONS	T.V.S.	DIODE	UNITS
STORAGE TEMPERATURE RANGE	T_{STG}		-40 ~ 150	-40 ~ 150	°C
JUNCTION TEMPERATURE	T_J		150	150	°C
PEAK SURGE REVERSE POWER	P_{RSM}	Non-repetitive 10/1000 μ S	500	-	W

ELECTRICAL CHARACTERISTICS (UNLESS OTHERWISE STATED $T_C = 25^\circ\text{C}$)

CHARACTERISTICS	SYMBOL	CONDITIONS	T.V.S.	DIODE	UNITS
LEAKAGE CURRENT	I_R	$V_R = V_{RM}$	Max. 5.0	Max. 5.0	μ A
REVERSE RECOVERY TIME	t_{rr}	IF/IR=0.1A/0.3A	-	Max. 500	nS
MAXIMUM JUNCTION CAPACITANCE AT 0 VOLTAGE	C_j		20		pf
STORAGE TEMPERATURE RANGE	T_{STG}		- 55 TO + 150		°C
OPERATING TEMPERATURE RANGE	T_{OP}		- 55 TO + 150		°C

NOTE : EQUIVALENT CIRCUIT


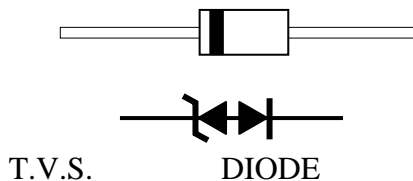


FIGURE 1 --AC Line Protection Application

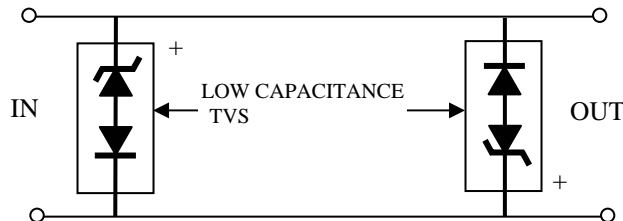

APPLICATION NOTE : Devices must be used with two units in parallel, opposite in polarity as shown in circuit for AC Signal Line protection

SAC SERIES ELECTRICAL CHARACTERISTICS @ 25°C

DEVICE	STAND-OFF VOLTAGE V_{WM} (VOLTS)	MIN. BREAKDOWN VOLTAGE AT $I_T=1.0\text{ mA}$ $V(VR)$ (VOLTS)	MAX. REVERSE LEAKAGE AT V_{RWM} I_D $IR(\mu A)$	MAX. CLAMPING VOLTAGE At $I_{pp}=5.0A$ V_c (VOLTS)	MAX PEAK PULSE CURRENT I_{pp} (AMPS)	INVERSE BLOCKING LEAKAGE CURRENT AT V_{WIB} I_{IB} (mA)	WORKING INVERSE BLOCKING VOLTAGE V_{WIB} (VOLTS)	MAX JUNCTION CAPACITANCE AT 0 VOLTS (Pf)	PEAK INVERSE BLOCKING VOLTAGE V_{PIB} (VOLTS)
SAC5.0	5.0	7.60	300	10.0	44	1.0	75	50	100
SAC6.0	6.0	7.90	300	11.2	41	1.0	75	50	100
SAC7.0	7.0	8.33	300	12.6	38	1.0	75	50	100
SAC8.0	8.0	8.89	100	13.4	36	1.0	75	50	100
SAC8.5	8.5	9.44	50	14.0	34	1.0	75	50	100
SAC10	10	11.10	5.0	16.3	29	1.0	75	50	100
SAC12	12	13.30	5.0	19.0	25	1.0	75	50	100
SAC15	15	16.70	5.0	23.6	20	1.0	75	50	100
SAC18	18	20.00	5.0	28.8	15	1.0	75	50	100
SAC22	22	24.40	5.0	35.4	14	1.0	75	50	100
SAC26	26	28.90	5.0	42.3	11.1	1.0	75	50	100
SAC30	30	33.30	5.0	48.6	10.0	1.0	75	50	100
SAC36	36	40.00	5.0	60.0	8.6	1.0	75	50	100
SAC45	45	50.00	5.0	77.0	6.8	1.0	150	50	100
SAC50	50	55.50	5.0	88.0	5.8	1.0	150	50	100

NOTE1: The SAC series is a low capacitance silicon transient voltage suppressor for data or signal lines. It is designed for commercial and industrial applications. This series offers pricing, size, and capacitance advantages. This series employs a standard TVS in series with a rectifier which reduces the effective capacitance up through 70MHz with a minimum amount of signal loss or deformation. If bidirectional transient protection capability is required, two low capacitance TVS must be used in parallel, opposite in polarity for complete AC protection.

NOTE2: The SAC series of low capacitance silicon transient voltage suppressors, rated at 400 watts, provides board level protection for data or signal lines from the damaging effects of electrostatic discharge(ESD), and electromagnetic pluse (EMP).It will clamp the inductive overshoot voltage caused by very fast impulse rise times. The low capacitance assures minimum signal attenuation.

NOTE3: A TVS is normally selected according to the reverse " Stand Off Voltage" (V_R) which should be equal to or greater than the DC or continuous peak operating voltage level

RATINGS AND CHARACTERISTIC CURVES SAC5.0 THRU SAC50

FIG. 1 - PEAK PULSE POWER RATING CURVE

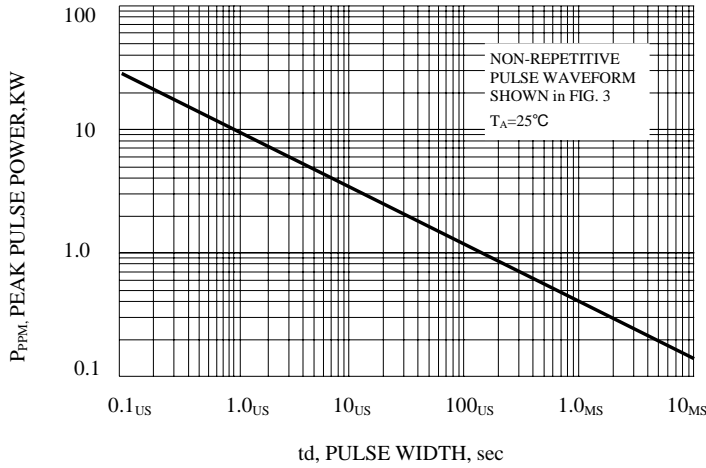


FIG. 2 - PULSE DERATING CURVE

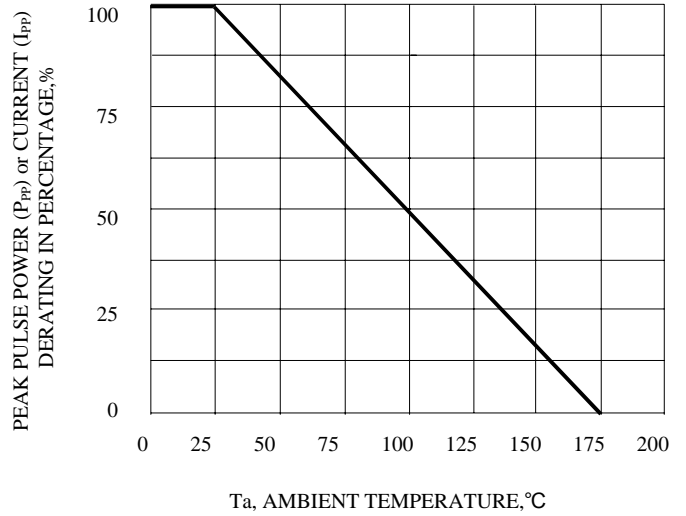


FIG. 3 - PULSE WAVEFORM

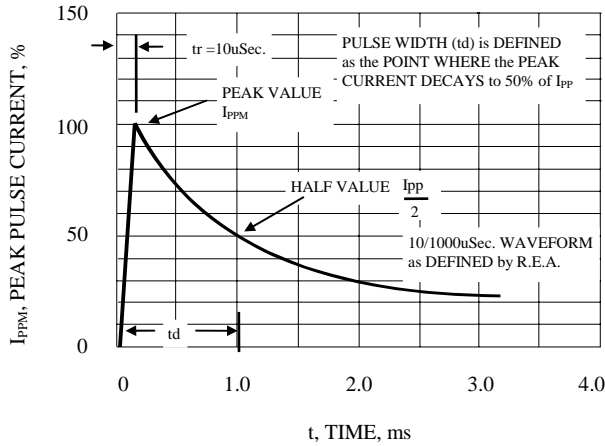


FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

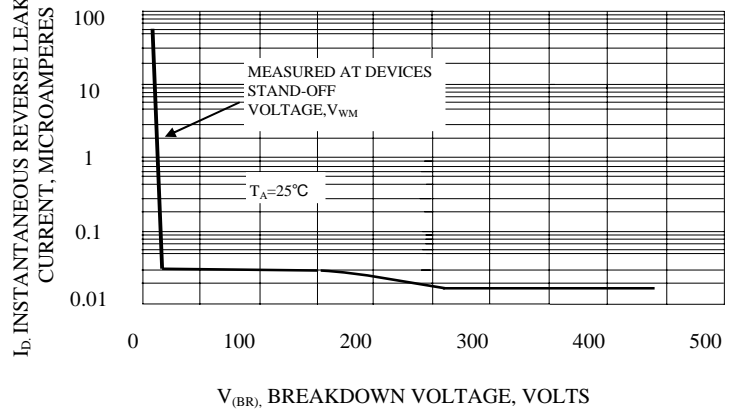


FIG. 5 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY

