

## ZPD2.7 - ZPD75

$V_Z$  : 2.7 to 75V

PD : 500mW

### FEATURES :

- Silicon planar zener diodes.
- Standard zener voltage tolerance is  $\pm 5\%$ .
- Other tolerances are available upon request.
- These diodes are also available in MiniMELF case with the type designation ZMM2.7 ... ZMM75.
- Pb / RoHS Free


### MECHANICAL DATA :

Case: DO-35 Glass Case

Weight: approx. 0.13g

## ZENER DIODES

### DO - 35 Glass (DO-204AH)

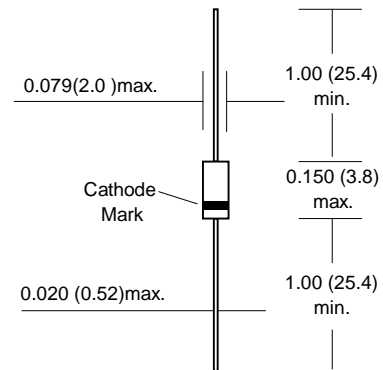

Dimensions in inches and ( millimeters )

### Maximum Ratings and Thermal Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Zener Current see Table "Characteristics"			
Power Dissipation	$P_D$	500 <sup>(1)</sup>	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	300 <sup>(2)</sup>	°C/W
Junction temperature	$T_J$	175	°C
Storage temperature range	$T_S$	-65 to + 175	°C

#### Note:

- (1) Valid provided that leads at a distance of 8mm from case are kept at ambient temperature.
- (2) Valid provided that leads at a distance of 4mm from case are kept at ambient temperature.

## ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

Type	Zener Voltage $V_Z @ I_{ZT}$		Dynamic Resistance at $I_Z=5mA$		Reverse Voltage at $I_R = 100 nA$ $V_R (V)$	Temp. coefficient of Zener Voltage at $I_{ZT}$		Admissible Zener Current $I_Z$ (mA)
	Nom <sup>1)</sup> (V)	$I_{ZT}$ (mA)	f = 1 kHz $r_{zj} (W)$	f = 1 kHz $r_{zj} (W)$		$\alpha_{VZ}(10^{-4} / ^\circ C)$		
						min.	max.	
ZPD2.7	2.7	5	6.5 (< 8)	< 500	-	-9	-4	160
ZPD3.0	3.0	5	75 (< 83)	< 500	-	-9	-3	140
ZPD3.3	3.3	5	80 (< 95)	< 500	-	-8	-3	130
ZPD3.6	3.6	5	80 (< 95)	< 500	-	-8	-3	120
ZPD3.9	3.9	5	80 (< 95)	< 500	-	-7	-3	110
ZPD4.3	4.3	5	80 (< 95)	< 500	-	-6	-1	100
ZPD4.7	4.7	5	70 (< 78)	< 500	-	-5	+2	90
ZPD5.1	5.1	5	30 (< 60)	< 480	> 0.8	-3	+4	80
ZPD5.6	5.6	5	10 (< 40)	< 400	> 1	-2	+6	70
ZPD6.2	6.2	5	4.8 (< 10)	< 200	> 2	-1	+7	64
ZPD6.8	6.8	5	4.5 (< 8)	< 150	> 3	+2	+7	58
ZPD7.5	7.5	5	4 (< 7)	< 50	> 5	+3	+7	53
ZPD8.2	8.2	5	4.5 (< 7)	< 50	> 6	+4	+7	47
ZPD9.1	9.1	5	4.8 (< 10)	< 50	> 7	+5	+8	43
ZPD10	10	5	5.2 (< 15)	< 70	> 7.5	+5	+8	40
ZPD11	11	5	6 (< 20)	< 70	> 8.5	+5	+9	36
ZPD12	12	5	7 (< 20)	< 90	> 9	+6	+9	32
ZPD13	13	5	9 (< 25)	< 110	> 10	+7	+9	29
ZPD15	15	5	11 (< 30)	< 110	> 11	+7	+9	27
ZPD16	16	5	13 (< 40)	< 170	> 12	+8	+9.5	24
ZPD18	18	5	18 (< 50)	< 170	> 14	+8	+9.5	21
ZPD20	20	5	20 (< 50)	< 220	> 15	+8	+10	20
ZPD22	22	5	25 (< 55)	< 220	> 17	+8	+10	18
ZPD24	24	5	28 (< 80)	< 220	> 18	+8	+10	16
ZPD27	27	5	30 (< 80)	< 250	> 20	+8	+10	14
ZPD30	30	5	35 (< 80)	< 250	> 22.5	+8	+10	13
ZPD33	33	5	40 (< 80)	< 250	> 25	+8	+10	12
ZPD36	36	5	40 (< 90)	< 250	> 27	+8	+10	11
ZPD39	39	5	50 (< 90)	< 300	> 29	+10	+12	10
ZPD43	43	5	60 (< 100)	< 700	> 32	+10	+12	9.2
ZPD47	47	5	70 (< 100)	< 750	> 35	+10	+12	8.5
ZPD51	51	5	70 (< 100)	< 750	> 38	+10	+12	7.8
ZPD56	56	2.5	< 135 <sup>(3)</sup>	< 1000 <sup>(4)</sup>	> 42	+10 (typ.)		7.1
ZPD62	62	2.5	< 150 <sup>(3)</sup>	< 1000 <sup>(4)</sup>	> 47	+ 10 (typ.)		6.4
ZPD68	68	2.5	< 200 <sup>(3)</sup>	< 1000 <sup>(4)</sup>	> 51	+ 10 (typ.)		5.8
ZPD75	75	2.5	< 250 <sup>(3)</sup>	< 1500 <sup>(4)</sup>	> 55	+ 10 (typ.)		5.3

Notes : 1) Tested with pulses  $t_p = 5 ms$

2) Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

3) at  $I_Z = 2.5mA$

4) at  $I_Z = 0.5mA$

5) The type number listed have a standard tolerance on the nominal zener voltage of  $\pm 5.0\%$ .