


**ST3237**

3 TO 5.5V, 250KBPS, RS-232 TRANSCEIVER WITH STAND-BY

- 1 μ A LOW POWER SHUTDOWN WITH RECEIVERS ACTIVE
- GUARANTEED DATA RATE 250Kbps (Normal Operation)
1Mbps (Very High Speed Operation)
- GUARANTEED SLEW RATE RANGE 6V/ μ s (Normal Operation)
24V/ μ s (Very High Speed Operation)
- 0.1 μ F EXTERNAL CAPACITORS
- FLOW-THROUGH PINOUT
- 500 μ A LOW SUPPLY CURRENT
- MEET EIA/TIA-232 SPECIFICATIONS DOWN TO 3V
- AVAILABLE IN SO-28, SSOP-28 AND TSSOP28

DESCRIPTION

The ST3237 is a 3V to 5.5V powered EIA/TIA-232 and V.28/V.24 communication interfaces high data-rate capabilities. ST3237 is a transceiver (5 drivers, 3 receivers) for fast modem applications. The device has a proprietary low-dropout transmitter output stage providing true RS-232 performance from a 3V to 5.5V supply using a dual charge pump. The device is guaranteed to run at data rates of 250Kbps in the normal

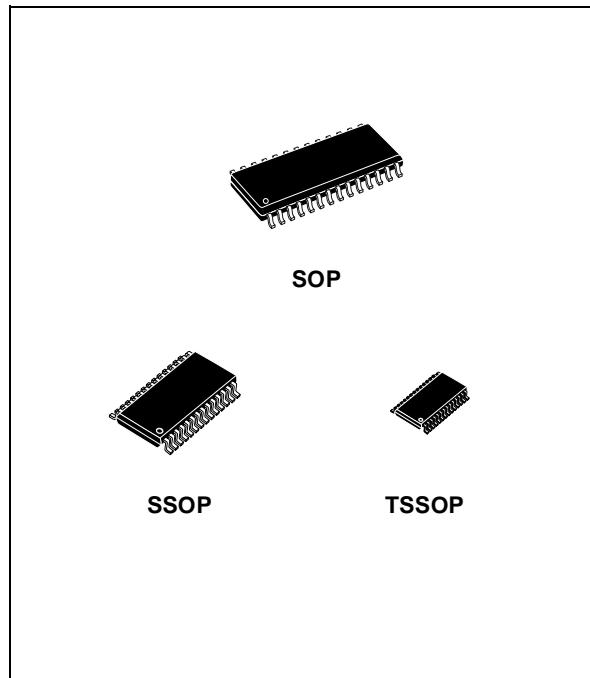

operation mode and 1Mbps in the very high speed operation mode while maintaining RS-232 output levels.

ORDERING CODES


Type	Temperature Range	Package	Comments
ST3237CD	0 to 70 °C	SO-28 (Tube)	27parts per tube / 12tube per box
ST3237BD	-40 to 85 °C	SO-28 (Tube)	27parts per tube / 12tube per box
ST3237CDR	0 to 70 °C	SO-28 (Tape & Reel)	1000 parts per reel
ST3237BDR	-40 to 85 °C	SO-28 (Tape & Reel)	1000 parts per reel
ST3237CPR	0 to 70 °C	SSOP-28 (Tape & Reel)	1350 parts per reel
ST3237BPR	-40 to 85 °C	SSOP-28 (Tape & Reel)	1350 parts per reel
ST3237CTR(*)	0 to 70 °C	TSSOP28 (Tape & Reel)	2500 parts per reel
ST3237BTR(*)	-40 to 85 °C	TSSOP28 (Tape & Reel)	2500 parts per reel

(*) Available on request

PIN DESCRIPTION

PIN N°	SYMBOL	NAME AND FUNCTION
1	C ₂ +	Positive Terminal of Inverting Charge Pump Capacitor
2	GND	Ground
3	C ₂ -	Negative Terminal of Inverting Charge Pump Capacitor
4	V-	5.5V Generated by the Charge Pump
5	T ₁ OUT	First Transmitter Output Voltage
6	T ₂ OUT	Second Transmitter Output Voltage
7	T ₃ OUT	Third Transmitter Output Voltage
8	R ₁ IN	First Receiver Input Voltage
9	R ₂ IN	Second Receiver Input Voltage
10	T ₄ OUT	Fourth Transmitter Output Voltage
11	R ₃ IN	Third Receiver Input Voltage
12	T ₅ OUT	Fifth Transmitter Output Voltage
13	EN	Receiver Enable, Active Low
14	SHDN	Shutdown Control, Active Low
15	VHSCI	Very High Speed Control Input. Connect to GND for normal operation; connect to VCC for 1Mbps transmission rates.
16	R ₁ OUTB	Non Inverting Complementary Receiver Output. Always Active.
17	T ₅ IN	Fifth Transmitter Input Voltage
18	R ₃ OUT	Third Receiver Output Voltage
19	T ₄ IN	Fourth Transmitter Input Voltage
20	R ₂ OUT	Second Receiver Output Voltage
21	R ₁ OUT	First Receiver Output Voltage
22	T ₃ IN	Third Transmitter Input Voltage
23	T ₂ IN	Second Transmitter Input Voltage
24	T ₁ N	First Transmitter Input Voltage
25	C ₁ -	Negative Terminal of Voltage- Charge Pump Capacitor
26	V _{CC}	Supply Voltage
27	V+	-5.5V Generated by the Charge Pump
28	C ₁ +	Positive Terminal of Voltage- Charge Pump Capacitor

PIN CONFIGURATION

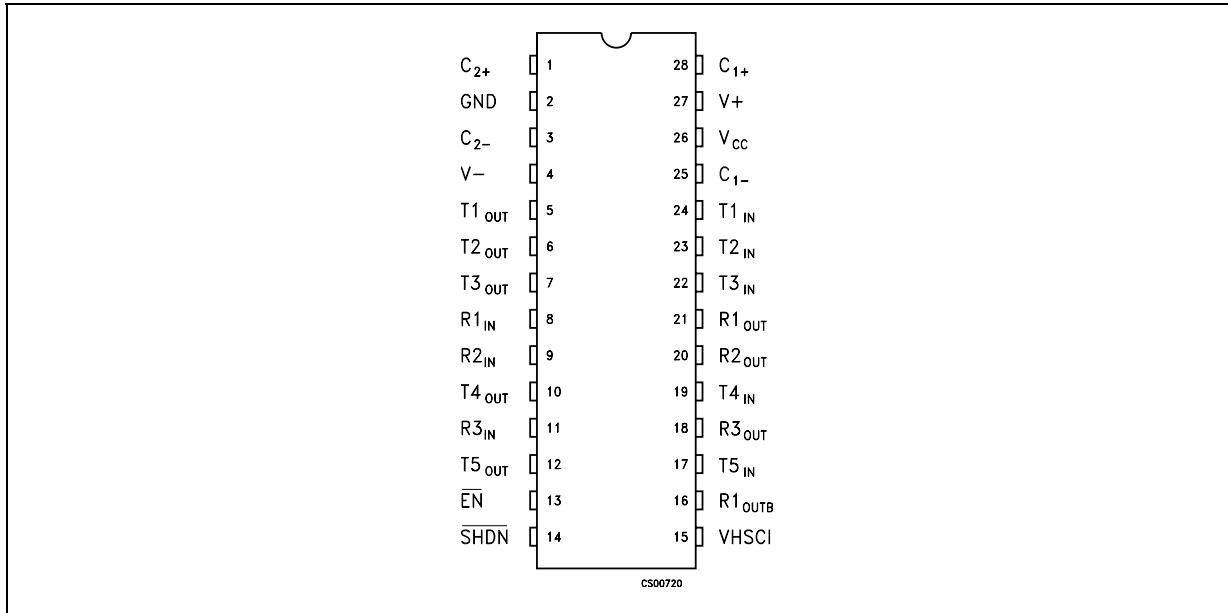

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	-0.3 to 6	V
V_+	Doubled Voltage Terminal	-0.3 to 7	V
V_-	Inverted Voltage Terminal	0.3 to -7	V
$V_+ + V_- $		13	V
T_{IN}	Transmitter Input Voltage Range	-0.3 to 6	V
SHDN, EN		-0.3 to 6	V
VHSCI	Very High Speed Control Input	-0.3 to ($V_{CC} + 0.3$)	V
R_{IN}	Receiver Input Voltage Range	± 25	V
T_{OUT}	Transmitter Output Voltage Range	± 13.2	V
R_{OUT} , R_{OUTB}	Receiver Output Voltage Range	-0.3 to ($V_{CC} + 0.3$)	V
t_{SHORT}	Short Circuit Duration on T_{OUT} (one at a time)	Continuous	
T_{stg}	Storage Temperature Range	-65 to 150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied. V_+ and V_- can have a maximum magnitude of +7V, but their absolute addition can not exceed 13 V.

ELECTRICAL CHARACTERISTICS(C₁ - C₄ = 0.1μF, V_{CC} = 3V to 5.5V, T_A = -40 to 85°C, unless otherwise specified.Typical values are referred to T_A = 25°C)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I _{SUPPLY}	V _{CC} Power Supply Current	No Load V _{CC} = 3V or 5.0V T _A = 25°C		0.5	2	mA
I _{SHDN}	Shutdown Supply Current	SHDN=GND T _A = 25°C		1	10	μA

LOGIC INPUT ELECTRICAL CHARACTERISTICS(C₁ - C₄ = 0.1μF, V_{CC} = 3V to 5.5V, T_A = -40 to 85°C, unless otherwise specified.Typical values are referred to T_A = 25°C)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{TIL}	Input Logic Threshold Low (Note 1)	T-IN, VHSCI, EN, SHDN			0.8	V
V _{TIH}	Input Logic Threshold High (Note 1)	V _{CC} = 3.3V V _{CC} = 5V	2 2.4			V V
I _{IL}	Input Leakage Current	T-IN, VHSCI, EN, SHDN		± 0.01	± 1.0	μA
I _{OL}	Output Leakage Current	Receiver Disabled		± 0.05	± 10	μA
V _{OL}	Output Voltage Low	I _{OUT} = 1.6mA			0.4	V
V _{OH}	Output Voltage High	I _{OUT} = -1mA	V _{CC} -0.6	V _{CC} -0.1		V

Note 1: Transmitter input hysteresis is typically 250mV

TRANSMITTER ELECTRICAL CHARACTERISTICS(C₁ - C₄ = 0.1μF tested at 3.3V±10%, V_{CC} = 3V to 5.5V, T_A = -40 to 85°C, unless otherwise specified.Typical values are referred to T_A = 25°C)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{TOUT}	Output Voltage Swing	All Transmitter outputs are loaded with 3KΩ to GND	± 5	± 5.4		V
R _{TOUT}	Transmitter Output Resistance	V _{CC} = V ₊ = V ₋ = 0V V _{OUT} = ± 2V		3000		Ω
I _{SC}	Output Short Circuit Current			± 25	± 60	mA

RECEIVER ELECTRICAL CHARACTERISTICS(C₁ - C₄ = 0.1μF tested at 3.3V±10%, V_{CC} = 3V to 5.5V, T_A = -40 to 85°C, unless otherwise specified.Typical values are referred to T_A = 25°C)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V _{RIN}	Receiver Input Voltage Operating Range		-25		25	V
V _{RIL}	RS-232 Input Threshold Low	T _A = 25°C V _{CC} = 3.3V T _A = 25°C V _{CC} = 5V	0.6 0.8	1.2 1.5		V V
V _{RIH}	RS-232 Input Threshold High	T _A = 25°C V _{CC} = 3.3V T _A = 25°C V _{CC} = 5V		1.5 1.8	2.4 2.4	V V
V _{RIHYS}	Input Hysteresis			0.3		V
R _{RIN}	Input Resistance	T _A = 25°C	3	5	7	KΩ


TIMING CHARACTERISTICS

($C_1 - C_4 = 0.1\mu F$ tested at $3.3V \pm 10\%$, $V_{CC} = 3V$ to $5.5V$, $T_A = -40$ to $85^\circ C$, unless otherwise specified.
Typical values are referred to $T_A = 25^\circ C$)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
D_R	Maximum Data Rate	$R_L = 3K\Omega$ $C_L = 1000pF$ one transmitter switching $VHSCI=GND$	250			Kbps
		$R_L = 3K\Omega$ $C_L = 250pF$ one transmitter switching $VHSCI=V_{CC}$ $V_{CC}=3$ to $5.55V$	100			Kbps
t_{PHLR} t_{PLHR}	Propagation Delay Input to Output	R_{IN} to R_{OUT} $C_L = 150pF$		0.15		μs
t_{T_SKEW}	Transmitter Skew	$ t_{PHL} - t_{TLH} $ $VHSCI=GND$		100		ns
		$ t_{PHL} - t_{TLH} $ $VHSCI=V_{CC}$		60		ns
t_{R_SKEW}	Receiver Skew	$ t_{PHL} - t_{TLH} $		50		ns
t_{OER}	Receiver Output Enable Time	Normal Operation		80		ns
t_{ODR}	Receiver Output Disable Time	Normal Operation		130		ns
S_{RT}	Transition Slew Rate	$T_A = 25^\circ C$ $R_L = 3$ to $7K\Omega$ $V_{CC} = 3.3V$ measured from $+3V$ to $-3V$ or $-3V$ to $+3V$ $C_L = 150pF$ to $1000pF$ $VHSCI=GND$ $C_L = 150pF$ to $1000pF$ $VHSCI=V_{CC}$ $C_L = 150pF$ to $2500pF$ $VHSCI=GND$	6 24 4		30 150 30	$V/\mu s$ $V/\mu s$ $V/\mu s$

Transmitter Skew is measured at the transmitter zero cross points

APPLICATION CIRCUITS

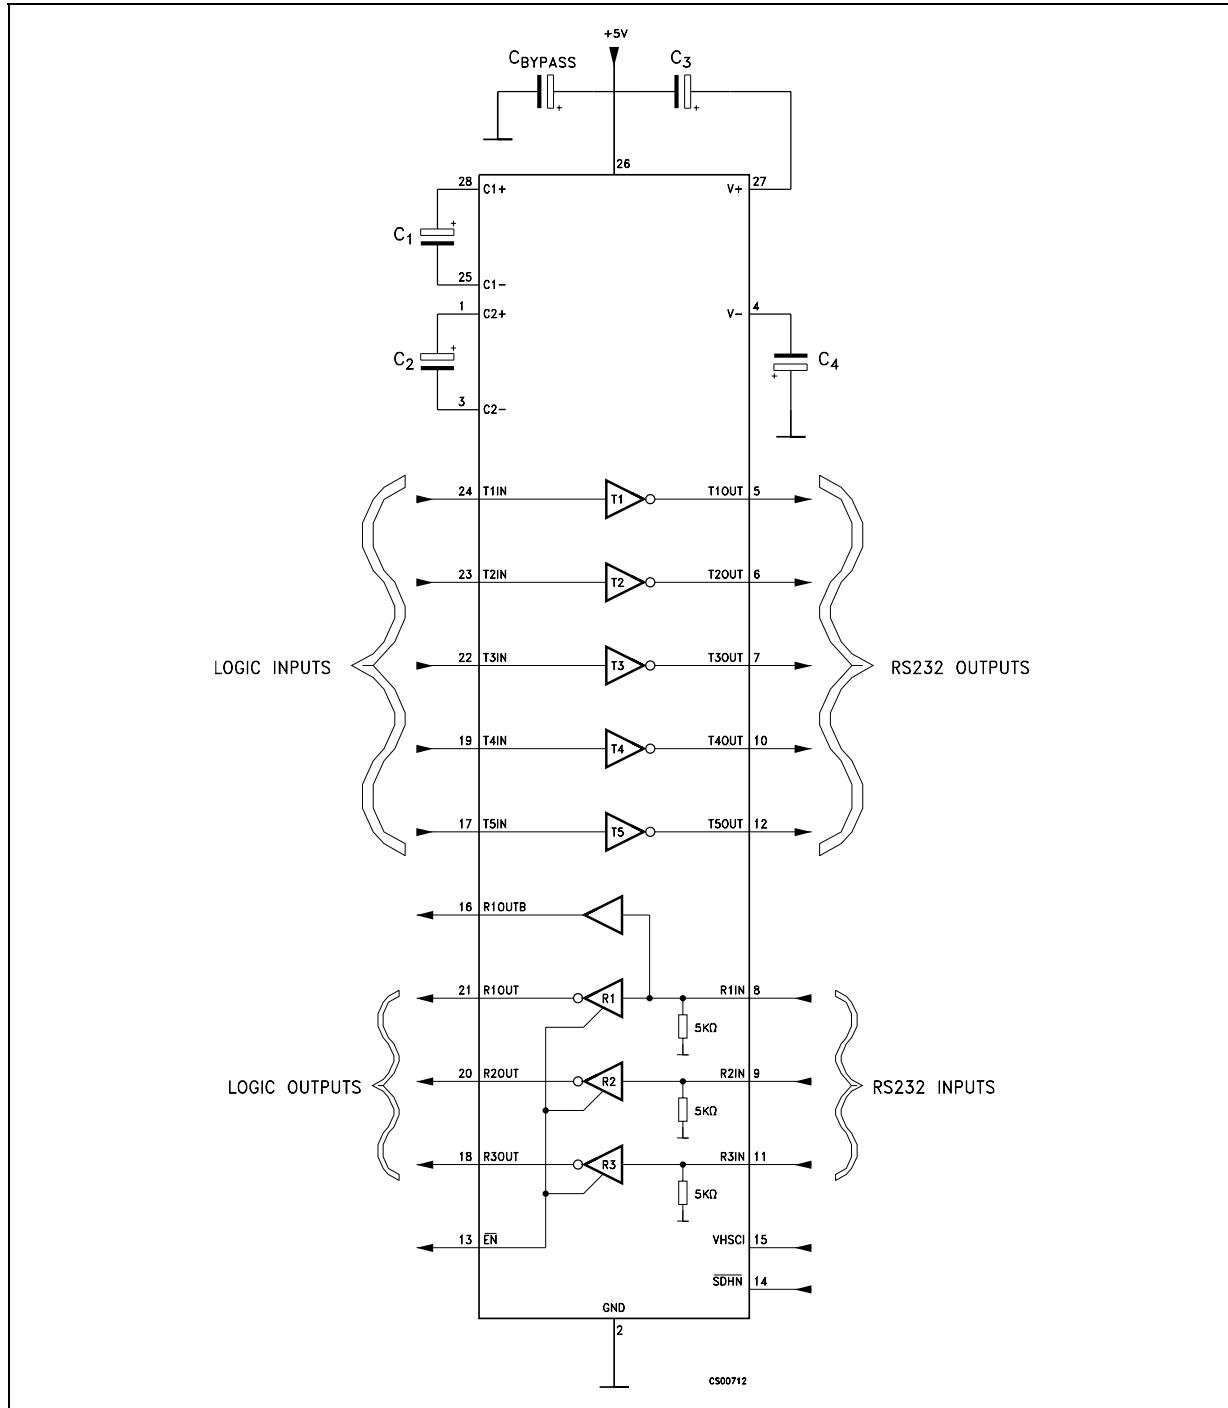CAPACITANCE VALUE (μF)

V_{CC}	C ₁	C ₂	C ₃	C ₄	C _{BYPASS}
3.0 to 3.6	0.22	0.22	0.22	0.22	0.22
4.5 to 5.5	0.047	0.33	0.33	0.33	0.33
3.0 to 5.5	0.22	1.0	1.0	1.0	0.22









TYPICAL PERFORMANCE CHARACTERISTICS (unless otherwise specified $T_j = 25^\circ\text{C}$)
Figure 1 : Input Voltage Range for Transmitter**Figure 2** : Transfer Characteristics for Transmitter**Figure 3** : Transfer Characteristics for Receiver**Figure 4** : Transfer Characteristics for Receiver**Figure 5** : Output Current vs Output High Voltage**Figure 6** : Output Current vs Output Low Voltage

Figure 7 : Receiver Input Resistance




SO-28 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			2.65			0.104
a1	0.1		0.3	0.004		0.012
b	0.35		0.49	0.014		0.019
b1	0.23		0.32	0.009		0.012
C		0.5			0.020	
c1	45° (typ.)					
D	17.70		18.10	0.697		0.713
E	10.00		10.65	0.393		0.419
e		1.27			0.050	
e3		16.51			0.650	
F	7.40		7.60	0.291		0.300
L	0.50		1.27	0.020		0.050
S	8° (max.)					

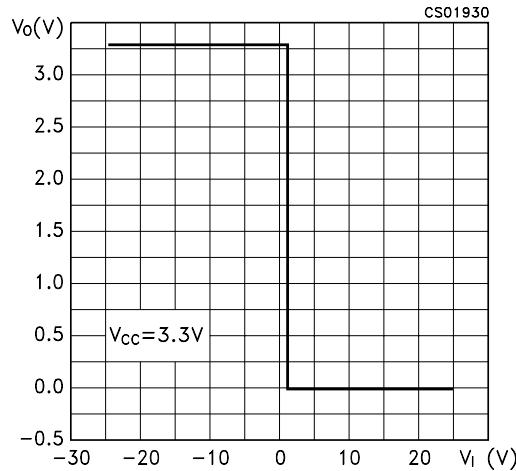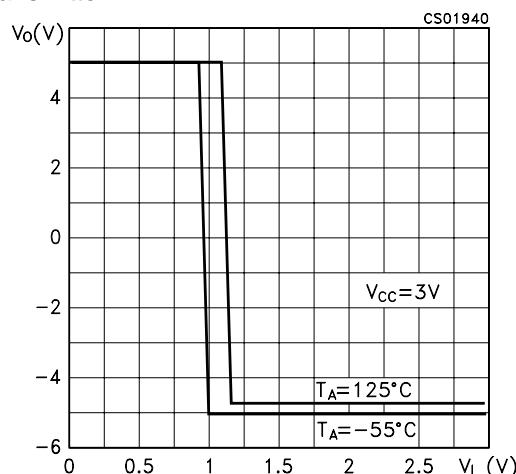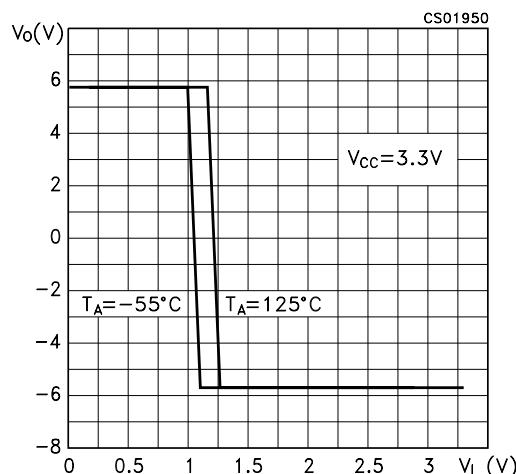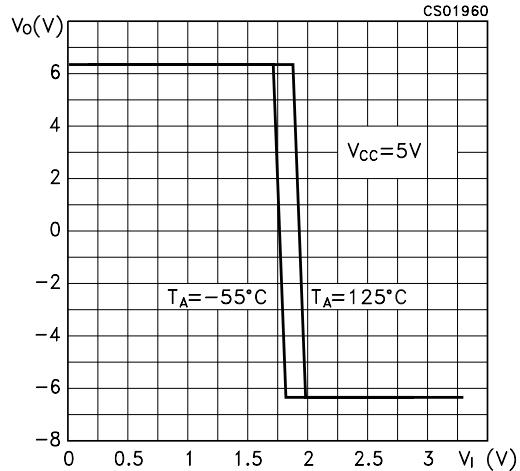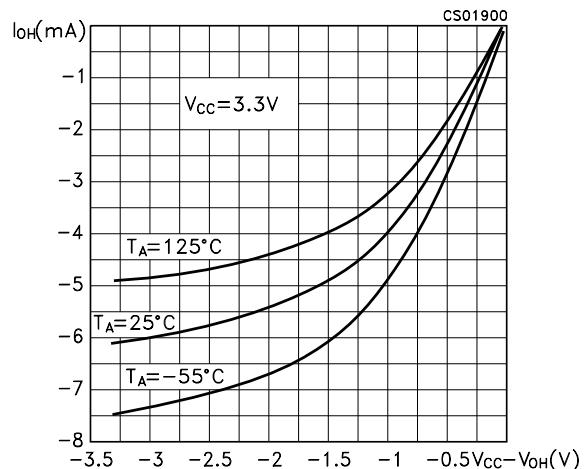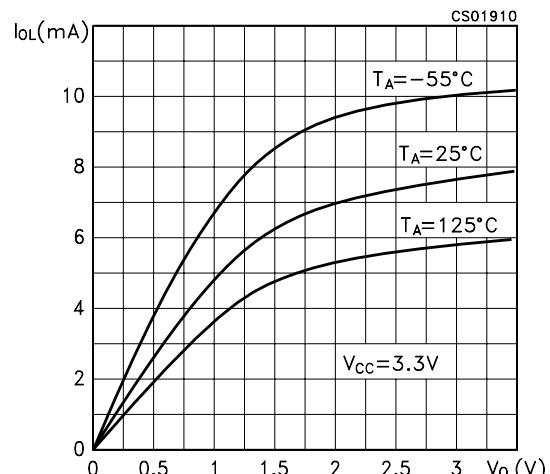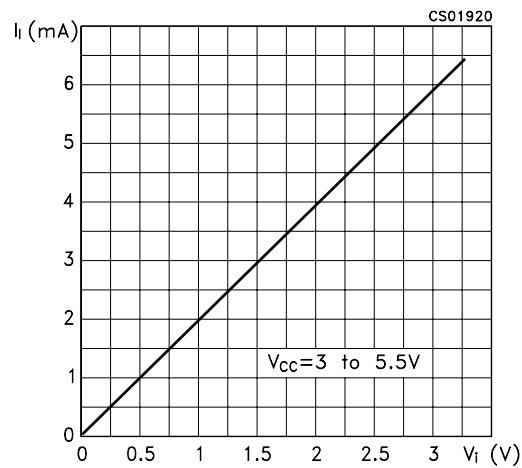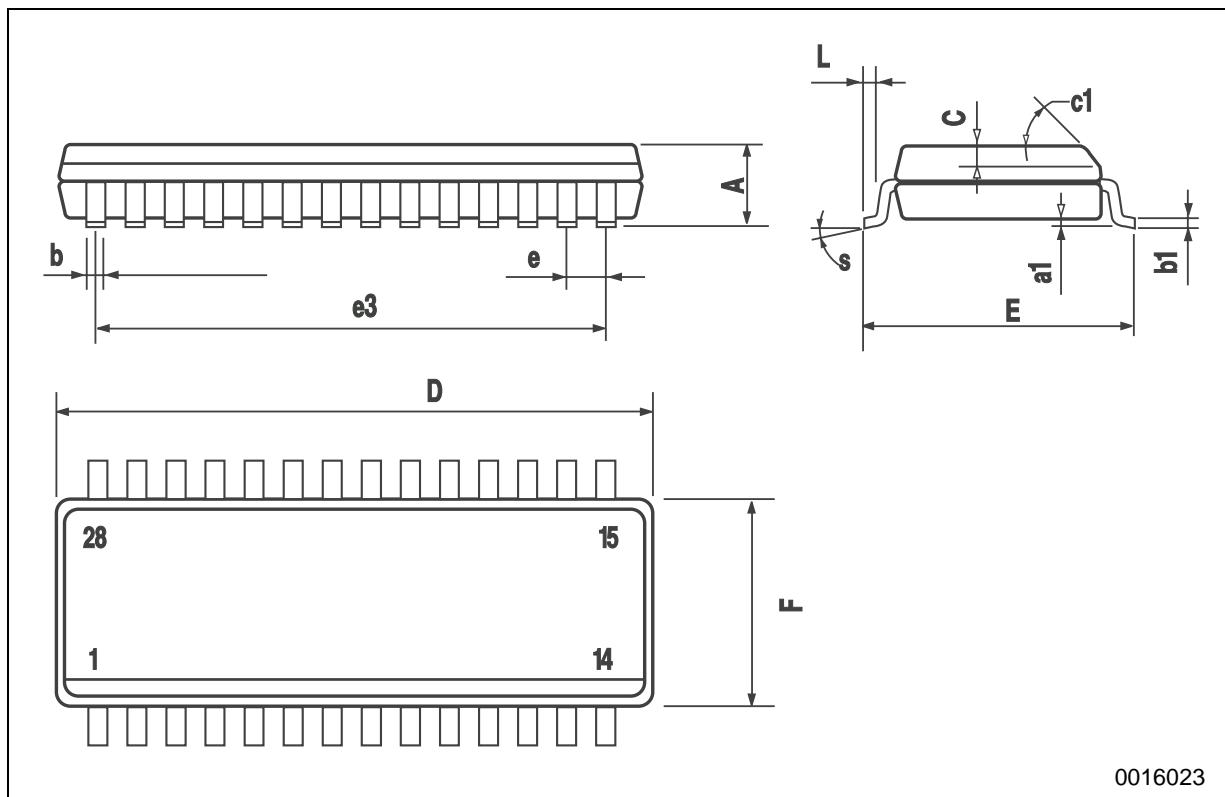


0016023

SSOP28 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			2			0.079
A1	0.050			0.002		
A2	1.65	1.75	1.85	0.065	0.069	0.073
b	0.22		0.38	0.009		0.015
c	0.09		0.25	0.004		0.010
D	9.9	10.2	10.5	0.390	0.402	0.413
E	7.4	7.8	8.2	0.291	0.307	0.323
E1	5	5.3	5.6	0.197	0.209	0.220
e		0.65 BSC			0.0256 BSC	
K	0°		10°	0°		10°
L	0.55	0.75	0.95	0.022	0.030	0.037

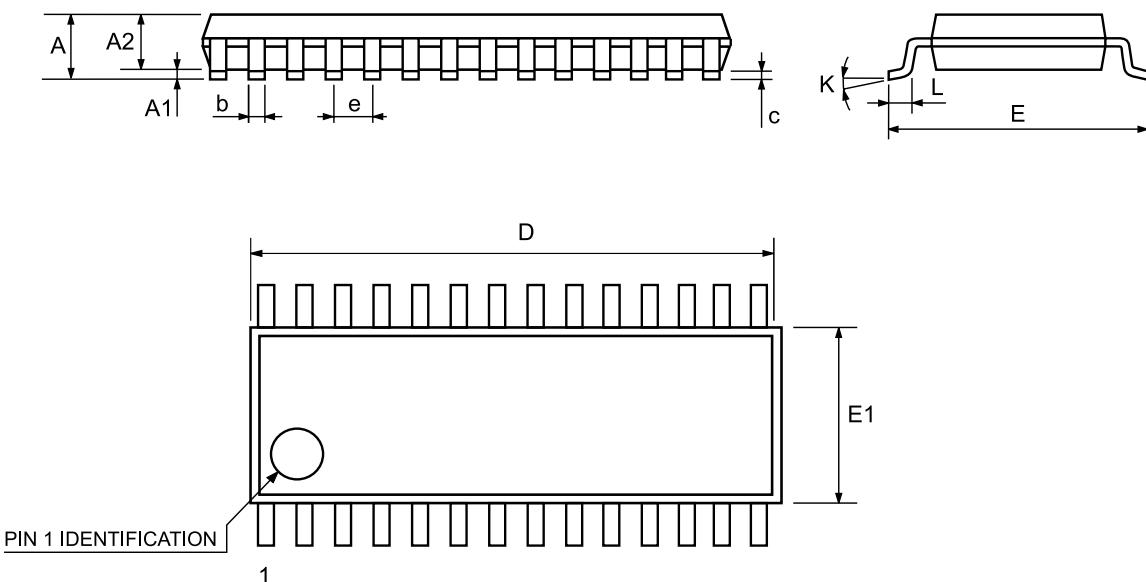


TSSOP28 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			1.2			0.047
A1	0.05		0.15	0.002	0.004	0.006
A2	0.8	1	1.05	0.031	0.039	0.041
b	0.19		0.30	0.007		0.012
c	0.09		0.20	0.004		0.0079
D	9.6	9.7	9.8	0.378	0.382	0.386
E	6.2	6.4	6.6	0.244	0.252	0.260
E1	4.3	4.4	4.48	0.169	0.173	0.176
e		0.65 BSC			0.0256 BSC	
K	0°		8°	0°		8°
L	0.45	0.60	0.75	0.018	0.024	0.030

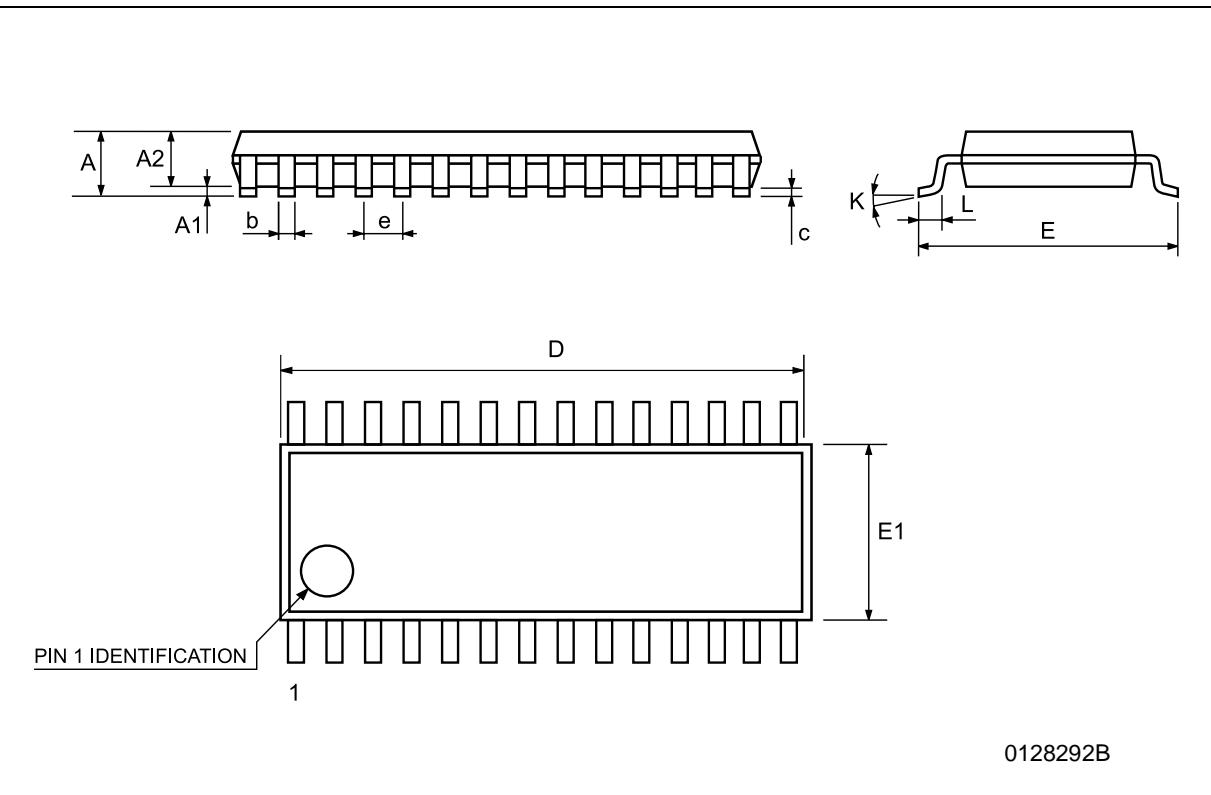


0128292B

Tape & Reel SO-28 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			30.4			1.197
Ao	10.8		11.0	0.425		0.433
Bo	18.2		18.4	0.716		0.724
Ko	2.9		3.1	0.114		0.122
Po	3.9		4.1	0.153		0.161
P	11.9		12.1	0.468		0.476

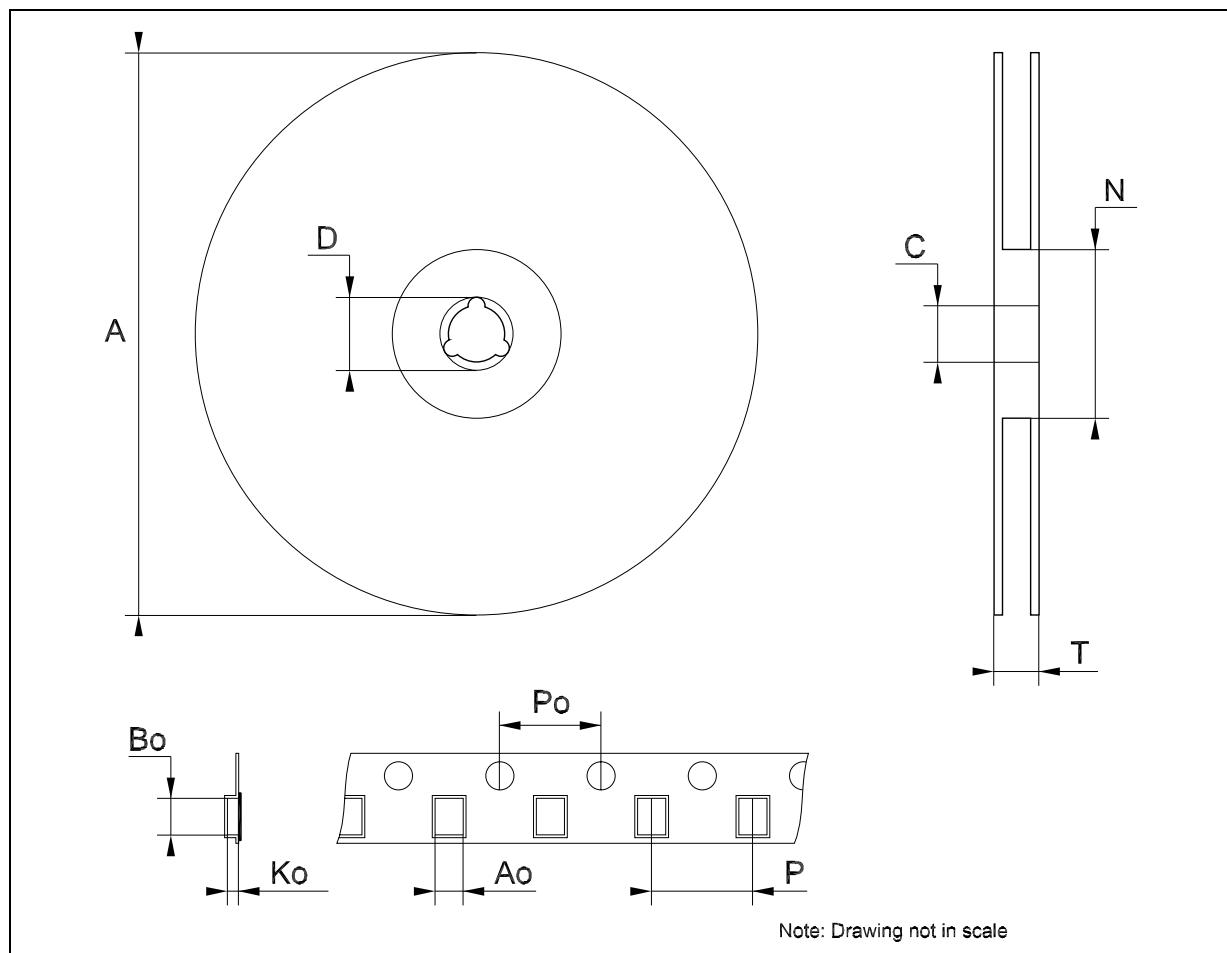


Tape & Reel SSOP28 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			22.4			0.882
Ao	8.4		8.6	0.331		0.339
Bo	10.7		10.9	0.421		0.429
Ko	2.9		3.1	0.114		0.122
Po	3.9		4.1	0.153		0.161
P	11.9		12.1	0.468		0.476

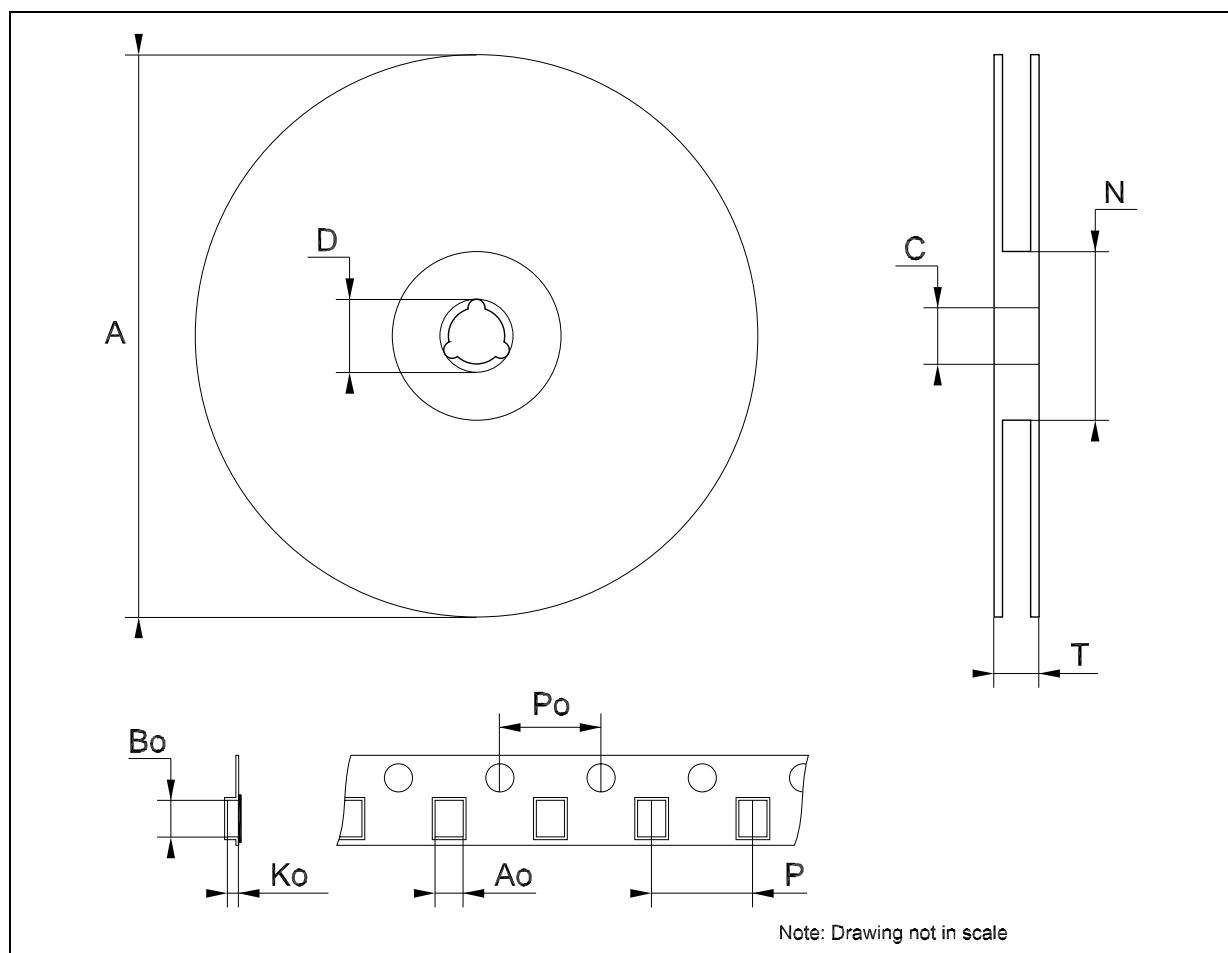

Tape & Reel TSSOP28 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			22.4			0.882
Ao	6.8		7	0.268		0.276
Bo	10.1		10.3	0.398		0.406
Ko	1.7		1.9	0.067		0.075
Po	3.9		4.1	0.153		0.161
P	11.9		12.1	0.468		0.476

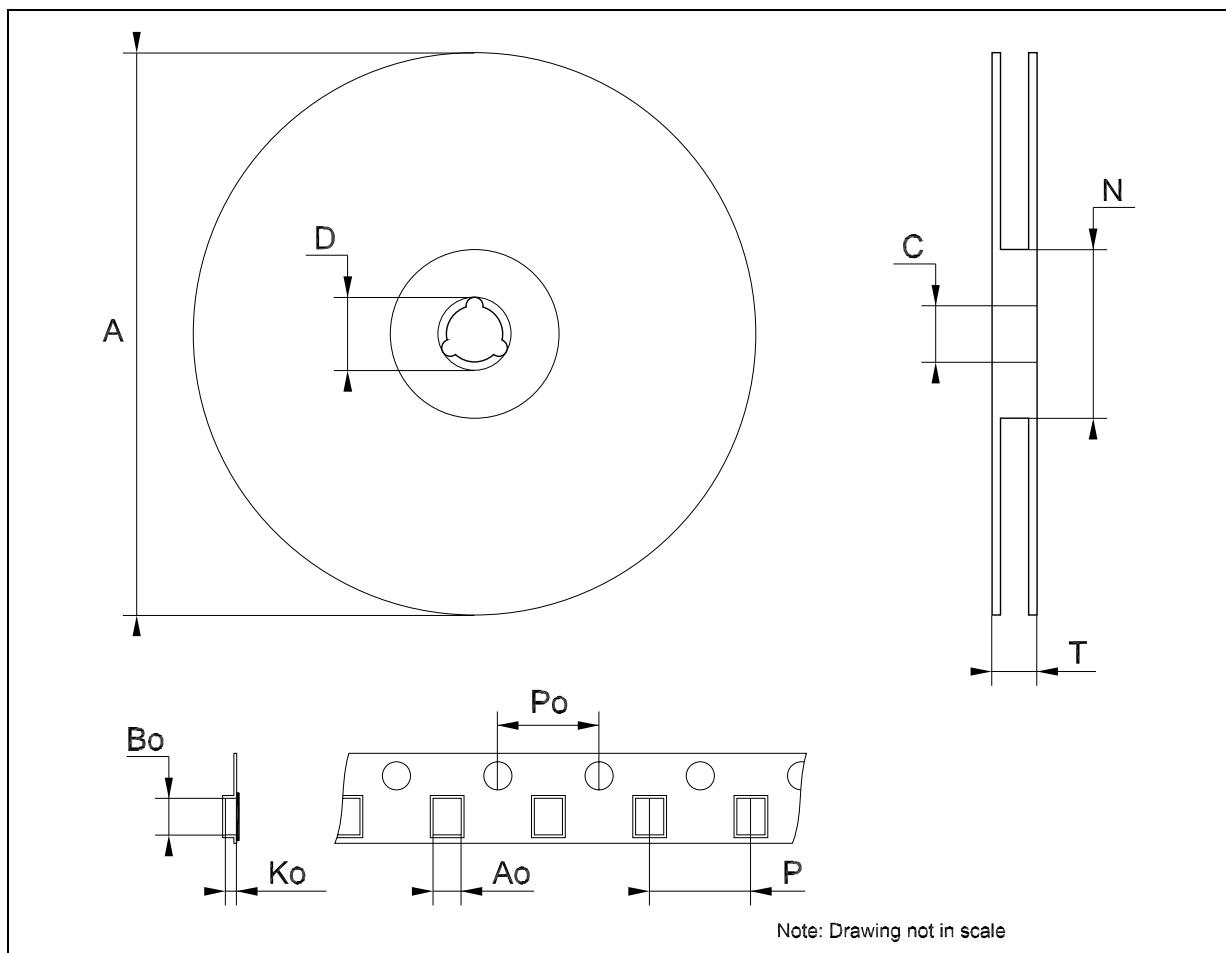

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics
All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.
<http://www.st.com>

