

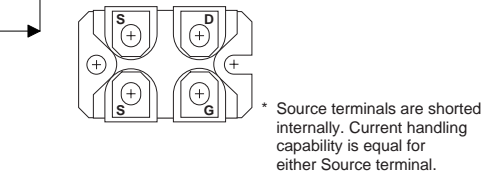


SOT-227 Package Outline.  
Dimensions in mm (inches)

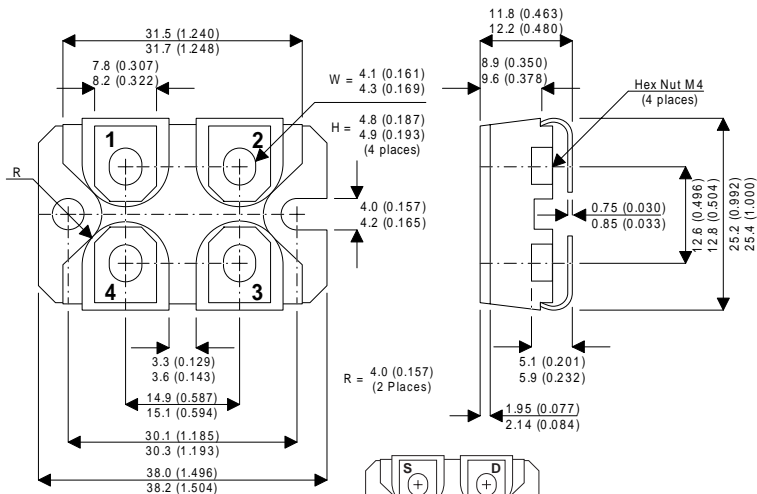

**N-CHANNEL  
ENHANCEMENT MODE  
HIGH VOLTAGE  
POWER MOSFETS**

**V<sub>DSS</sub> 300V**  
**I<sub>D(cont)</sub> 130A**  
**R<sub>DS(on)</sub> 0.019Ω**

- **Faster Switching**
- **Lower Leakage**
- **100% Avalanche Tested**
- **Popular SOT-227 Package**

StarMOS is a new generation of high voltage N-Channel enhancement mode power MOSFETs. This new technology minimises the JFET effect, increases packing density and reduces the on-resistance. StarMOS also achieves faster switching speeds through optimised gate layout.

**ABSOLUTE MAXIMUM RATINGS** (T<sub>case</sub> = 25°C unless otherwise stated)

V <sub>DSS</sub>	Drain – Source Voltage	300	V
I <sub>D</sub>	Continuous Drain Current	130	A
I <sub>DM</sub>	Pulsed Drain Current <sup>1</sup>	520	A
V <sub>GS</sub>	Gate – Source Voltage	±30	V
V <sub>GSM</sub>	Gate – Source Voltage Transient	±40	
P <sub>D</sub>	Total Power Dissipation @ T <sub>case</sub> = 25°C	700	W
	Derate Linearly	5.6	W/°C
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Junction Temperature Range	-55 to 150	°C
T <sub>L</sub>	Lead Temperature : 0.063" from Case for 10 Sec.	300	
I <sub>AR</sub>	Avalanche Current <sup>1</sup> (Repetitive and Non-Repetitive)	130	A
E <sub>AR</sub>	Repetitive Avalanche Energy <sup>1</sup>	50	mJ
E <sub>AS</sub>	Single Pulse Avalanche Energy <sup>2</sup>	3600	

1) Repetitive Rating: Pulse Width limited by maximum junction temperature.

2) Starting T<sub>J</sub> = 25°C, L = 426µH, R<sub>G</sub> = 25Ω, Peak I<sub>L</sub> = 130A

**STATIC ELECTRICAL RATINGS** ( $T_{case} = 25^{\circ}C$  unless otherwise stated)

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
$BV_{DSS}$	Drain – Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	300			V
$I_{DSS}$	Zero Gate Voltage Drain Current ( $V_{GS} = 0V$ )	$V_{DS} = V_{DSS}$			100	$\mu A$
		$V_{DS} = 0.8V_{DSS}, T_C = 125^{\circ}C$			500	
$I_{GSS}$	Gate – Source Leakage Current	$V_{GS} = \pm 30V, V_{DS} = 0V$			$\pm 100$	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 2.5mA$	2		4	V
$I_{D(ON)}$	On State Drain Current <sup>2</sup>	$V_{DS} > I_{D(ON)} \times R_{DS(ON)}$ Max $V_{GS} = 10V$	130			A
$R_{DS(ON)}$	Drain – Source On State Resistance <sup>2</sup>	$V_{GS} = 10V, I_D = 0.5 I_D [Cont.]$			0.019	$\Omega$

**DYNAMIC CHARACTERISTICS**

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
$C_{iss}$	Input Capacitance	$V_{GS} = 0V$		18000		pF
$C_{oss}$	Output Capacitance	$V_{DS} = 25V$		3250		
$C_{rss}$	Reverse Transfer Capacitance	$f = 1MHz$		900		
$Q_g$	Total Gate Charge <sup>3</sup>	$V_{GS} = 10V$		630		nC
$Q_{gs}$	Gate – Source Charge	$V_{DD} = 0.5 V_{DSS}$		100		
$Q_{gd}$	Gate – Drain (“Miller”) Charge	$I_D = I_D [Cont.] @ 25^{\circ}C$		310		
$t_{d(on)}$	Turn-on Delay Time	$V_{GS} = 15V$		24		ns
$t_r$	Rise Time	$V_{DD} = 0.5 V_{DSS}$		33		
$t_{d(off)}$	Turn-off Delay Time	$I_D = I_D [Cont.] @ 25^{\circ}C$		80		
$t_f$	Fall Time	$R_G = 0.6\Omega$		10		

**SOURCE – DRAIN DIODE RATINGS AND CHARACTERISTICS**

	Characteristic	Test Conditions	Min.	Typ.	Max.	Unit
$I_S$	Continuous Source Current	(Body Diode)			130	A
$I_{SM}$	Pulsed Source Current <sup>1</sup>	(Body Diode)			520	
$V_{SD}$	Diode Forward Voltage <sup>2</sup>	$V_{GS} = 0V, I_S = -I_D [Cont.]$			1.3	V
$t_{rr}$	Reverse Recovery Time	$I_S = -I_D [Cont.], di_S / dt = 100A/\mu s$		620		ns
$Q_{rr}$	Reverse Recovery Charge	$I_S = -I_D [Cont.], di_S / dt = 100A/\mu s$		14		$\mu C$

**THERMAL CHARACTERISTICS**

	Characteristic	Min.	Typ.	Max.	Unit
$R_{\theta JC}$	Junction to Case			0.18	$^{\circ}C/W$
$R_{\theta JA}$	Junction to Ambient			40	

1) Repetitive Rating: Pulse Width limited by maximum junction temperature.

2) Pulse Test: Pulse Width < 380 $\mu s$ , Duty Cycle < 2%

3) See MIL-STD-750 Method 3471



CAUTION — Electrostatic Sensitive Devices. Anti-Static Procedures Must Be Followed.