

## SB15005 THRU SB1510

### 15.0 AMP SILICON BRIDGE

#### FEATURES

- \* Universals 4-way terminals: snap-on, wrap-around, solder or P.C. board mounting
- \* This series is UL recognized under component index, file number E127707
- \* High overload surge RATING TO 300A
- \* High case dielectric strength to 2500V
- \* Typical IR less than 0.1 uA
- \* Terminals solderable per MIL-STD-202 method 208
- \* High temperature soldering guaranteed : 265°C/10 seconds/.375"(9.5mm)lead lengths at 5 lbs (2.3kg) tension

#### MECHANICAL DATA

- \* Case: Void-free plastic package
- \* Terminal: Either plated .25"(6.35mm). Faston or plated copper lead .04"(1.02mm)diameter. Suffix letter "W" added to indicate leads
- \* Polarity: Polarity symbols marked on case
- \* Mounting position: Bolt down on heat sink for maximum heat transfer efficiency
- \* Weight: 0.706 ounce, 20 grams



#### VOLTAGE RANGE

50 to 1000 Volts

#### CURRENT

15.0 Amperes

#### SB-15

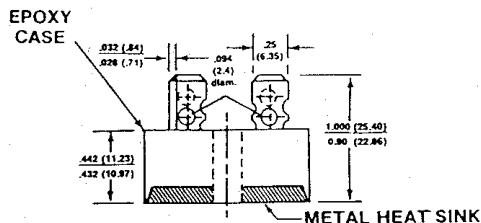

Dimensions in inches and (millimeters)

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load derate current by 20%.

	SYMBOLS	SB15005	SB1501	SB1502	SB1504	SB1506	SB1508	SB1510	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>rms</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>dc</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectifier Output Current at T <sub>c</sub> =55°C (Note1)	I(AV)	15.0							A
Peak Forward Surge Current 8.3 ms single half sine wave superimposed on rated load (JEDEC method)	I <sub>fsm</sub>	300.0							A
Rating for fusing(t<8.35ms)	I <sup>2</sup> t	375.0							A <sup>2</sup> s
Maximum instantaneous Forward Voltage drop per Bridge Element at 7.5A	V <sub>F</sub>	1.2							V
Maximum Reverse Current at Rated DC @T <sub>A</sub> =25°C	I <sub>R</sub>	10.0							uA
Blocking Voltage per element @T <sub>C</sub> =100°C	HTIR	500.0							uA
Isolation Voltage from Case to Leads		2500							Vac
Typical Thermal Resistance (Note1)	R <sub>THjc</sub>	2.0							°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-65 TO +150							°C

#### NOTES :

1. Bridge mounted on a 5" \* 4" \* 3" (12.8cm \* 10.2cm \* 7.3cm) AL Wing Plate.

# RATINGS AND CHARACTERISTIC CURVES SB15005 THRU SB1510

FIG. 1 MAXIMUM OUTPUT RECTIFIED CURRENT

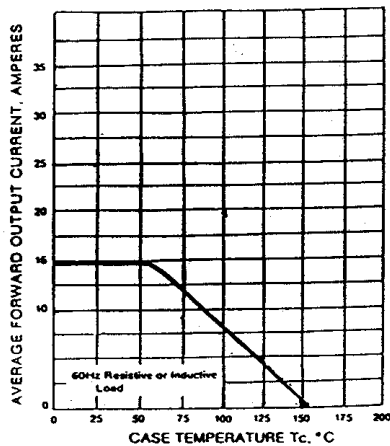


FIG. 2 MAXIMUM POWER DISSIPATION

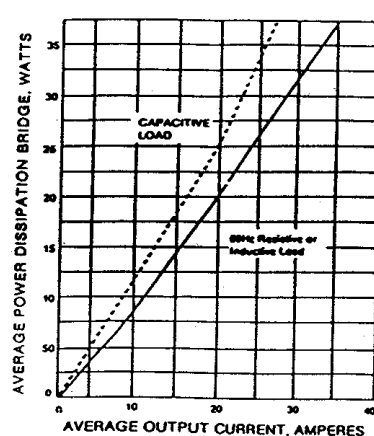


FIG. 3 TYPICAL REVERSE CHARACTERISTICS

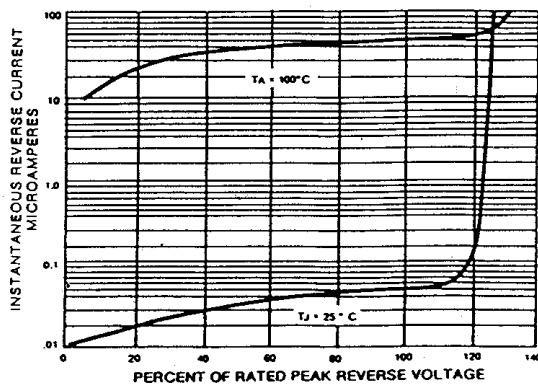


FIG. 4

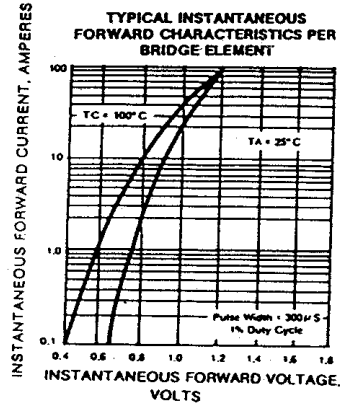


FIG. 5 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


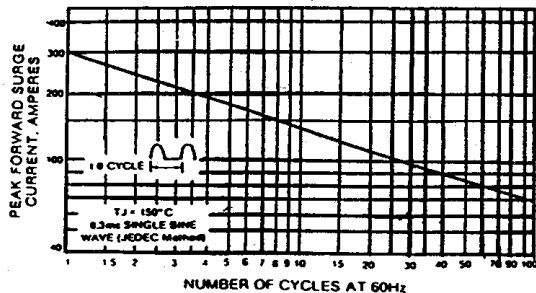


FIG. 6

TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

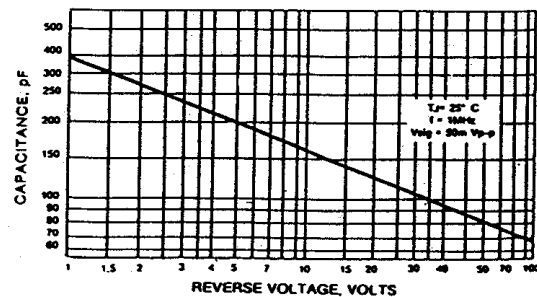

## SB15005W THRU SB1510W

### 15.0 AMP SILICON BRIDGE

#### FEATURES

- \* Universals 4-way terminals: snap-on, wrap-around, solder or P.C. board mounting
- \* This series is UL recognized under component index, file number E127707
- \* High overload surge RATING TO 300A
- \* High case dielectric strength to 2500V
- \* Typical IR less than 0.1 uA
- \* Terminals solderable per MIL-STD-202 method 208
- \* High temperature soldering guaranteed : 265°C/10 seconds/.375" (9.5mm) lead lengths at 5 lbs (2.3kg) tension

#### MECHANICAL DATA

- \* Case: Void-free plastic package
- \* Terminal: Either plated .25" (6.35mm). Faston or plated copper lead .04" (1.02mm) diameter. Suffix letter "W" added to indicate leads
- \* Polarity: Polarity symbols marked on case
- \* Mounting position: Bolt down on heat sink for maximum heat transfer efficiency
- \* Weight: 0.706 ounce, 20 grams



#### VOLTAGE RANGE

50 to 1000 Volts

#### CURRENT

15.0 Amperes

#### SB-15

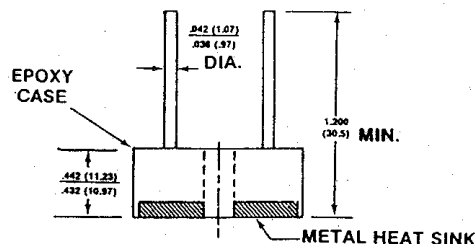

Dimensions in inches and (millimeters)

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load derate current by 20%.

	SYMBOLS	SB15005W	SB15010W	SB15020W	SB15040W	SB1406W	SB1508W	SB1510W	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>rms</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>dc</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectifier Output Current at T <sub>c</sub> =55°C (Note 1)	I(AV)	15.0							A
Peak Forward Surge Current 8.3 ms single half sine wave superimposed on rated load (JEDEC method)	I <sub>fsm</sub>	300.0							A
Rating for fusing (t<8.35ms)	I <sup>2</sup> t	375.0							A <sup>2</sup> s
Maximum instantaneous Forward Voltage drop per Bridge Element at 7.5A	V <sub>F</sub>	1.2							V
Maximum Reverse Current at Rated DC @T <sub>A</sub> =25°C	IR	10.0							uA
Blocking Voltage per element @T <sub>C</sub> =100°C	HTIR	500.0							uA
Isolation Voltage from Case to Leads		2500							Vac
Typical Thermal Resistance (Note 1)	R <sub>THjc</sub>	2.0							°C/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>stg</sub>	-65 TO +150							°C

#### NOTES :

1. Bridge mounted on a 5" \* 4" \* 3" (12.8cm \* 10.2cm \* 7.3cm) AL Wing Plate.

# RATINGS AND CHARACTERISTIC CURVES SB1505W THRU SB1510W

FIG. 1 MAXIMUM OUTPUT RECTIFIED CURRENT

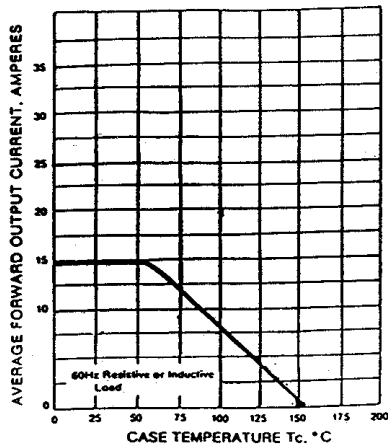


FIG. 2 MAXIMUM POWER DISSIPATION

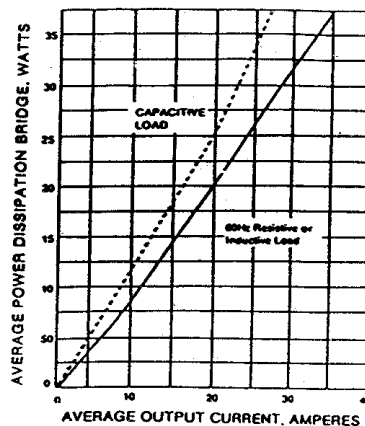


FIG. 3 TYPICAL REVERSE CHARACTERISTICS

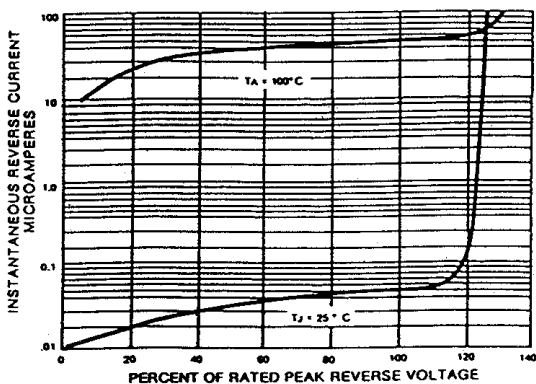


FIG. 4

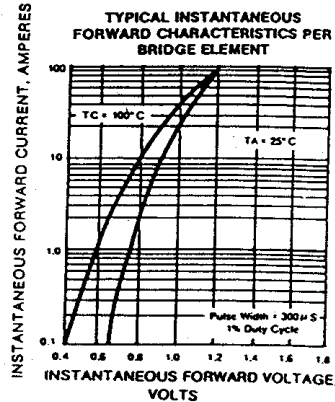


FIG. 5 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

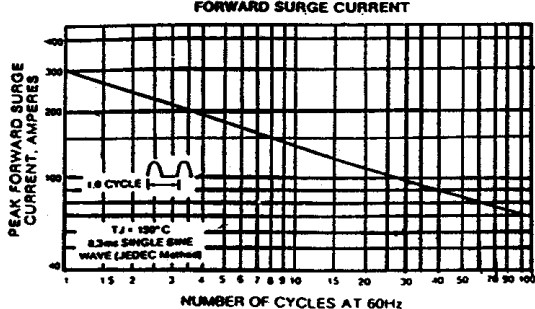


FIG. 6

